

**SITE REQUIREMENTS**



Shown with optional Side Shovel




Shown with optional Plus Roller

	TC3900 Family	TC3700 Family	TC3300 Family
<b>Power Requirements</b>	208-230V, 15A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P	208-230V, 12A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P	208-230V, 12A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P
<b>Air Supply Requirements</b>	115-145 psi (8-10 bar)	115-145 psi (8-10 bar)	115-145 psi (8-10 bar)
<b>Shipping Weight</b>	750 lbs (340 kg)	708 lbs (321 kg)*	515 lbs (234 kg)* **
<b>Shipping Weight with Wheel Lift</b>	875 lbs (397 kg)	850 lbs (386 kg)*	657 lbs (298 kg)* **
<b>Width (W)</b>	48 in. (1219 mm)	43 in. (1,092 mm)***	43 in. (1,092 mm)***
<b>Height (H)</b>	76 in. (1930 mm)	72 in. (1,829 mm)	72 in. (1,829 mm)
<b>Depth (D)</b>	58 in. (1473 mm)	43 in. (1,092 mm)	43 in. (1,092 mm)

\* Add 76 lbs (34 kg) to weight for bead press arm, \*\* Add 89 lbs (40 kg) to weight for Plus device, \*\*\* Add 10 in. (254 mm) to width for wheel lift

**KEY SPECIFICATIONS**

	TC3900 Family	TC3700 Family	TC3300 Family
<b>Mount / Demount Tool</b>	Polymer Self-inserting leverless	Polymer Mount Head	Polymer Mount Head
<b>Clamping Type</b>	Center w/Quick Clamp and Cam Plate	Center w/Quick Clamp and Cam Plate	Center w/Quick Clamp
<b>Bead Loosening Type</b>	Rollers or Shovel (optional)	Rollers or Shovel	Shovel
<b>Match Mounting Capable</b>	Yes	Yes	No
<b>Adjustable Clamping Height</b>	Yes	Yes	No
<b>Rim Diameter Range</b>	10-28 in.	10-28 in.	10-22 in.
<b>Maximum Tire Diameter</b>	50 in.	50 in.	50 in.
<b>Maximum Wheel Width</b>	19 in.	19 in.	17 in.
<b>Drive</b>	7 and 15 rpm CW 15 rpm CCW	7 and 15 rpm CW 15 rpm CCW	15 rpm CW 15 rpm CCW

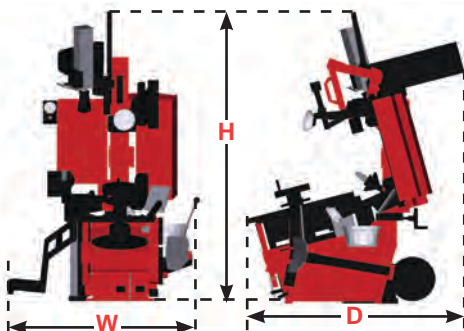

For tire changer information visit:  
[www.hunter.com/tirechanger](http://www.hunter.com/tirechanger)

For local contact visit:  
[www.hunter.com/company/findrep.cfm](http://www.hunter.com/company/findrep.cfm)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)  
or call  
**800-448-6848**